


Aufbauleuchten


Ontero-Econdo



	MBFL 50 W	MBFL 100 W	BBS 35 W	BBS 70 W	BBS 100 W	BBS 150 W	LED Standard	LED Flood
Reflektoren								
Basic	●	●	●	●	●	●		
Spot								
Batwing (50°/70°/90°)	●	●	●	●	●	●		
WideWing	●	●	●	●	●	●		
MaxBeam (nur Silber)	●	●	●	●	●	●		
Flood								
Wallwasher	●	●	●	●	●	●		
LED-Basic								
LED-Spot								
Reflektorfarben								
Silber	●	●	●	●	●	●		
Neusilber	●	●	●	●	●	●		
Filterscheiben								
Patentfilter	●	●	●	●	●	●		
UV-Filter	●	●	●	●	●	●		
Splitterschutz	●	●	●	●	●	●		
Leuchtenbeschreibung	Aufbauleuchte liegendes Leuchtmittel							
Technische Details	dreh- und schwenkbar Anbringung mit Multi-Adapter, Wand- dose oder Stecker für Rail-Systeme Gewicht: 3,7 kg							

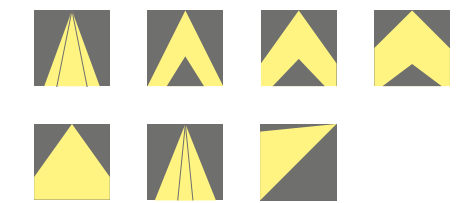

Leuchtenfarben

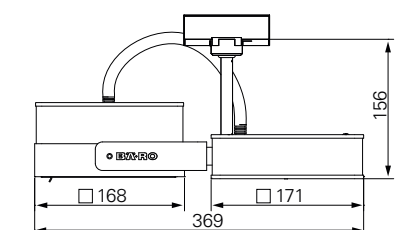

Produktmatrix

- Kombination erhältlich
 - Besonders zu empfehlen
 - Pflichtbestellung
- Leuchten mit BBS-Leuchtmittel müssen immer mit einem Filter oder einer Splitterschutzscheibe betrieben werden

Leuchtenfarben

- Stratosilber
- Silber
- Weiß
- Schwarz
- RAL RAL-Sonderfarben
- Gold eloxiert
- Silber eloxiert / chrom
- Stahl gebürstet / Alu blank

Leuchtenmerkmale

- ☑ Keine Infrarotstrahlung
- ☑ Keine UV-Strahlung

Glasfarben

- Weiß RAL 9010
- Champagner RAL 9001
- Gelb RAL 1018
- Orange RAL 2009
- Rot RAL 3020
- Blau RAL 5013

LED-Einbauring

- Weiß
- Warmweiß
- Gelb
- Rot
- Blau
- Grün

Reflektoren

-  Basic
-  Spot
-  Batwing 50°
-  Batwing 70°
-  Batwing 90°
-  WideWing
-  MaxBeam
-  Flood
-  Wallwasher
-  WallBeam
-  LED-Basic
-  LED-Spot
-  Power-Basic
-  Power-Batwing 50°
-  Power-MaxBeam