



BÄRO UV-C compact fixture

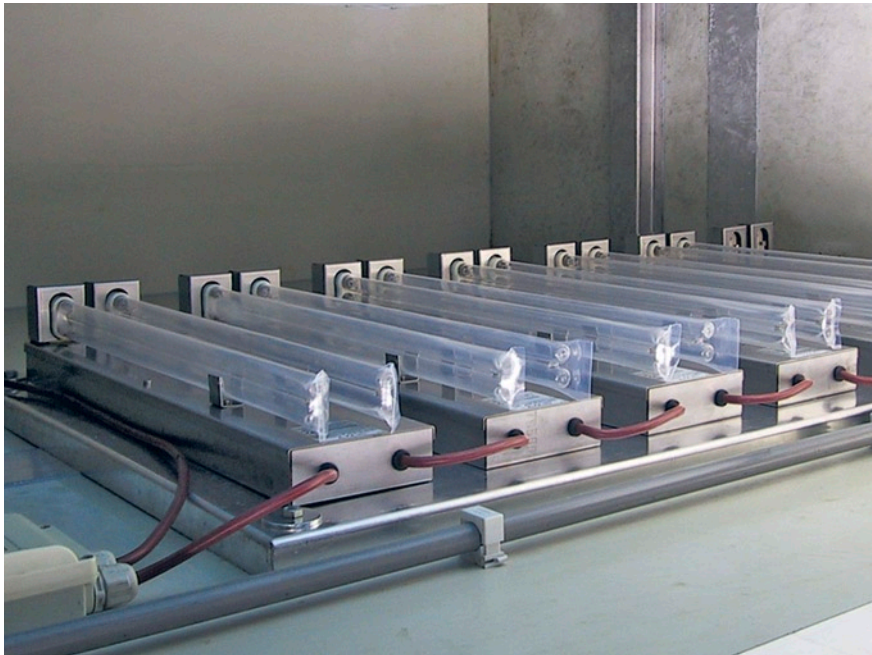

The BÄRO UV-C compact fixture has been specially developed for those situations where space is at a premium. The UV-C compact emitters enable excellent disinfection results to be achieved within just a small space.

253.7 nm UV-C radiation is used to reduce the number of germs. This wavelength has a lethal effect on microorganisms such as bacteria, moulds yeasts and viruses.

Low-pressure UV-C emitters that produce no ozone serve to generate the short-wave UV-C radiation, which provides a high level of radiant efficiency. A special interior coating of the quartz glass ensures an exceptionally long service life with minimal decline in radiative power.

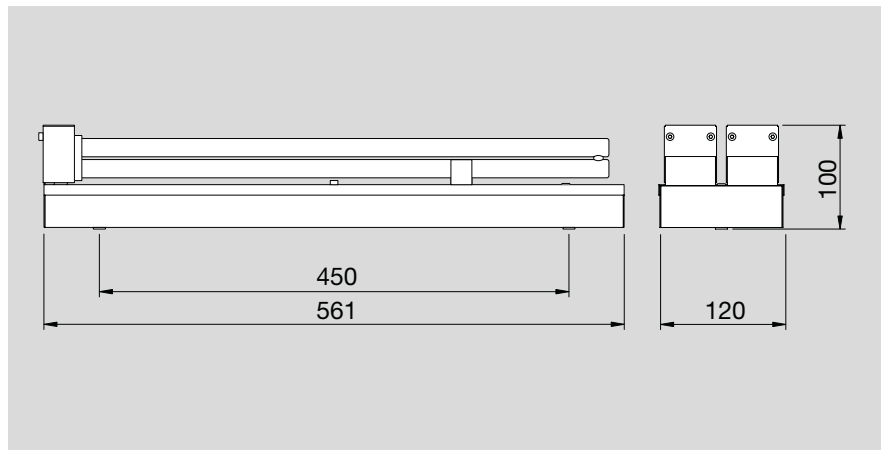

Technical description	Type: 2 x 60 Watt	Type: 2 x 95 Watt
Product no.	896260008P	896295008P
Length	561 mm	561 mm
Width	120 mm	120 mm
Height	100 mm	100 mm
Supply voltage	120–277 V ~ 50 /60 Hz	120–277 V ~ 50 /60 Hz
Power consumption	130 Watt	210 Watt
UV-C emitters	2 x 60 Watt, with optional Teflon coating	2 x 95 Watt, with optional Teflon coating
UV-C emitter product no.	286003 (T)	289503 (T)
Emitter service life	8,000 hrs.	8,000 hrs.
Safety class	I	I
Protection class	IP 20	IP 20
Weight	2.2 kg	3.0 kg

Applications:

- Surface disinfection of
 - Conveyor belts
 - Equipment
 - Dough-rising surfaces etc.
- Air disinfection in air-conditioning systems

BÄRO
Air hygiene

Wolfstall 54–56 · 42799 Leichlingen
 Phone + 49 2174 - 799-505
 Fax + 49 2174 - 799 799
 baero-technology@baero.com
 www.baero.com