


WideWing reflector

WideWing reflector (BBS 100 W)



The light cones of the WideWing reflector have a beam angle of 80° to the display width and 90° to the display length. This reflector is ideal in the pivoted position for illuminating sloping surfaces. Long, wide product displays illuminated from a low height. Tiered fruit and vegetable displays and product display tables are typical areas of application.

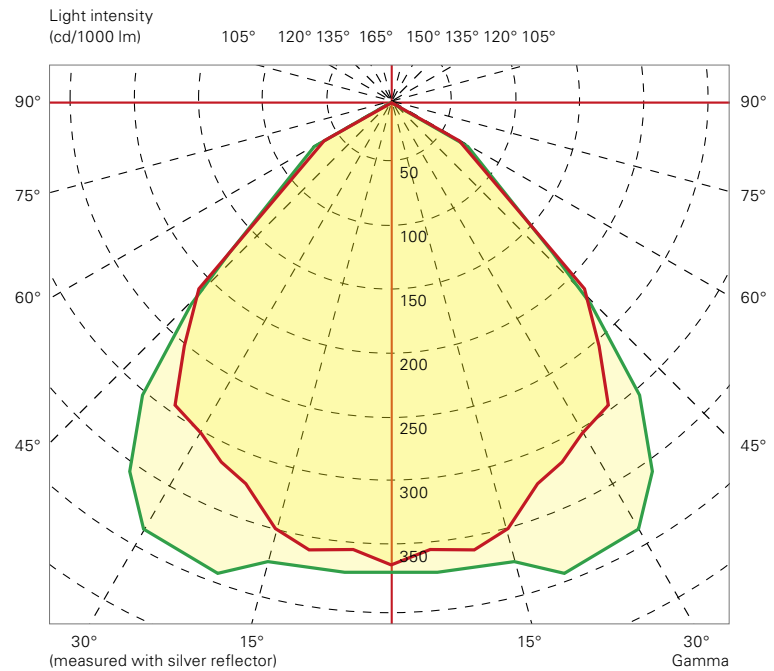

		MBFL 50 W	MBFL 100 W	BBS 70 W	BBS 100 W	BBS 150 W
1 m	Ø 1.65 m 2.13 m	886 lx	1771 lx	2694 lx	4059 lx	5535 lx
2 m	Ø 3.29 m 4.26 m	222 lx	443 lx	674 lx	1015 lx	1384 lx
3 m	Ø 4.94 m 6.39 m	99 lx	197 lx	299 lx	451 lx	615 lx
4 m	Ø 6.59 m 8.51 m	56 lx	111 lx	169 lx	254 lx	346 lx
5 m	Ø 8.24 m 10.64 m	36 lx	71 lx	108 lx	162 lx	220 lx