

Luminaire rail systems

Mono-Rail



Description

Tube support systems for light and suspended luminaires

Technical details


One tube
Tube made of aluminium
Diameter 50 mm
For circles and ovals, minimum diameter of circle 2,000 mm
Rectangles and squares, from an edge length of 1,000 mm
Powder-coated, standard colour RAL 9006, any RAL colour possible on request
Steel cable suspensions fully adjustable



Further information

Mono-Rail is designed and manufactured individually.
Accessories such as steel cables, feed connection units, etc. are determined and selected by our Engineering department.

Luminaire colours

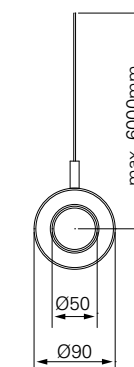

Product matrix

- Combination available
 - Particularly recommended
 - Mandatory order
- Luminaires with BBS lamps must always have a filter or shatter protection disc

Luminaire colours

- Strato silver
- Silver
- White
- Black
- RAL special colours
- Gold anodised
- Silver anodised / chrome
- Steel brushed / aluminium blank

Luminaire features

- IR No infrared rays
- UV No UV rays

Glass colours

- White RAL 9010
- Champagne RAL 9001
- Yellow RAL 1018
- Orange RAL 2009
- Red RAL 3020
- Blue RAL 5013

LED recess ring

- White
- Warm white
- Yellow
- Red
- Blue
- Green

Reflectors

-  Basic
-  Spot
-  Batwing 50°
-  Batwing 70°
-  Batwing 90°
-  WideWing
-  MaxBeam
-  Flood
-  Wallwasher
-  WallBeam
-  LED Basic
-  LED Spot
-  Power-Basic
-  Power-Batwing 50°
-  Power-MaxBeam