



Pendiro EC 125

Article number: 81050311

LIGHT TECHNOLOGY

LED	COB
Light colour	Meat&Fish
Luminous flux	2670 lm
System power	41 W
Luminaire Efficiency	65 lm/W
Reflector	Spot
Beam angle	20°
Controller	On/Off

LUMINAIRE

Weight
Protection rating . class
Luminaire colour


OPTIONAL

RAL-colours, NCS-colours (powder coating or wet spraying) on inquiry, surface alloys on inquiry, honeycomb louver

3.0 kg

white

IP 20.I






Suspended luminaire with LED, rated life of the LED L80/B10 > 50000 h, colour rendering index CRI > 70, chromaticity tolerance 2 SDCM (initial), reflector with circular light distribution pattern, reflector pure aluminium 99,99% in MIRO-Silver®, canopy sheet steel, powder-coated, luminaire head die-cast aluminium, powder-coated, white

Multiadapter black, inclusive driver unit: 220-240 V
~ / 50-60 Hz, 220-240 V, 50/60 Hz

Note: All data are typical values. System features may change with product improvements due to technical advances. Errors excepted.

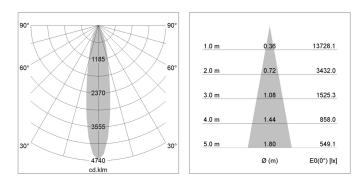

CE

X

www.baero.com