

BÄRO

Retail
Lighting

Ontero EC Track

OUTSTANDING VERSATILITY

Multi-functional luminaire with a prize-winning design. State-of-the-art LED COB and modern driver technology guarantee perfect light quality and very high efficiency.

The luminaire heads are made of die-cast aluminum. Integrated cooling fins enable excellent thermal management which ensures optimum operating conditions for the LED's used and therefore a long life.

As a project partner and system supplier, BÄRO Retail Lighting offers innovative lighting solutions for all formats in the multi-faceted world of retail: "Fresh Light *for* Fresh Products".



Applications

- General lighting
- Accent lighting
- Aisle lighting
- Fresh food lighting
- Product presentation

Benefits

- 7 Light colors
- 4 Beam characteristics
- 4 Mounting options
- 3 Fixture colors
- 2 Wattages
- 1 Dimming option
- $\pm 105^\circ$ Pivot angle
- $\pm 165^\circ$ Swivelling angle
- 5 years limited warranty



BÄRO North America, Inc.
10545 Baur Boulevard
St. Louis, MO 63132

P (314) 692-BAR0 (2270)
M info@baerousa.com
www.baerousa.com

Perfect for high end fresh food displays

PRODUCT OVERVIEW

Type: Track
 Power options: 42W, 63W (constant current), 63W except Meat & Fish
 42W, 63W (1-10V 100%-1%), only for EUTRAC adapter
 Lumen Output: 6,490 lm@63 W, 940, 103 lm/W
 Color Temp: 90+ CRI: 2,700 K, 3,000 K, 3,500 K, 4,000 K, GoldenBread
 85~ CRI: Sun
 70~ CRI: Meat&Fish

MOUNTING OPTIONS

Eutrac 120 V, 277 V
 HALO® 120 V
 Juno® 120 V

ELECTRICAL

Input voltage: 100 V - 277 V
 Input frequency: 50/60 hz
 System power factor:
 > 0.95

RATINGS

Operating Temperature: + 40°F to 100°F
 Location: UL Dry
 Safety: CSA Certified
 Lifetime: 50,000 h > 80%

REFLECTOR OPTIONS

2 Rotational-Symmetrical
 (Spot 20°, Flood 40°)
 1 Asymmetrical
 (OvalBasic 60° x 40°)
 1 Double Asymmetrical
 (BatWing 2 x 25°)

FIXTURE FINISH OPTIONS


Black, Silver, White

ADAPTOR COLOR

Black (for Fixture Finish Black/Silver)
 White (for Fixture Finish White)





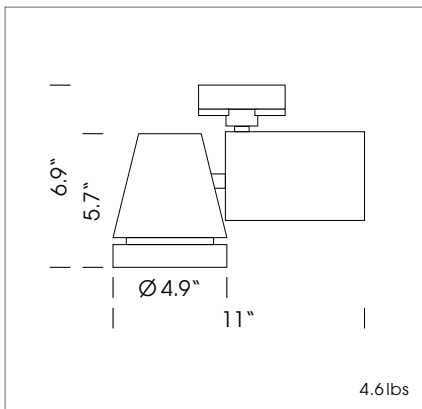


Ontero EC with BatWing-Reflector



4.6lbs

ONTERO EC MODEL NUMBER BREAKDOWN (I.E. OEC930LF-OBE1-2)

OEC	930	L	F	OB	E1	2	
Fixture designation	Array	Description	Power Description	Dimming Description	Reflector Description	Track adapter Description	Paint color Description
OEC	927	2,700 K 90+ CRI	L Low 42 W	F Fixed output	OB 	E1 Eutrac 120 V	2 Black
	930	3,000 K 90+ CRI	H High 63 W	D 0-10 dimmable	FL 	E2 Eutrac 277 V	3 Silver (special order)
	935	3,500 K 90+ CRI	MFS available in low power only		SP 	J1 Juno 120 V	6 White
	940	4,000 K 90+ CRI	BatWing available in high power only		BW 	H1 HALO 120 V	
	GBR	GoldenBread 90+ CRI				HALO/Juno available in constant current only	
	SUN	Sun 85~ CRI					
	MFS	Meat&Fish 70~ CRI					
		MFS available in low power only					

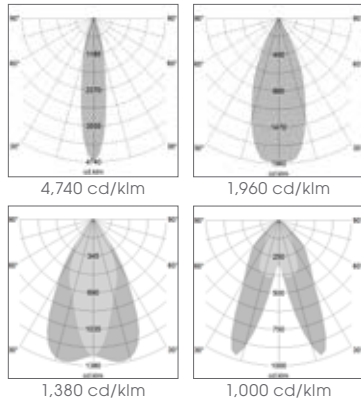

	927	930	935	940	Golden Bread	Sun	Meat& Fish
TM30-15 (RF/RG)	90/99	89/103	88/103	88/99	88/94	84/115	83/114
42W	4,110	4,320	4,590	4,760	4,120	2,490	2,860
63W	5,670	5,880	6,260	6,490	5,570	3,360	3,890

Luminous flux (lm)

The luminaire luminous flux figures vary in a tolerance range of ± 10%. All data are typical values. System features may change if product improvements are made due to technical advances. Errors excepted.